


Deck Replacement

1. Remove motor hood.
2. Remove screw from foot rail on each side.



3. Remove base caps on right and left with a Phillips screw driver. (bottom hole)

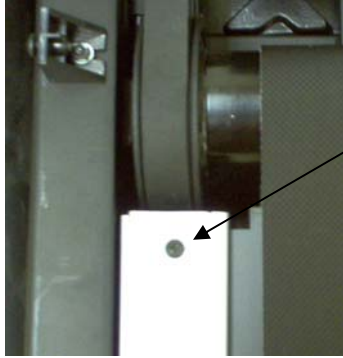

4. Slide foot rail to the end of the unit.



5. Remove eight deck bolts, (four on each side) using 5m allen wrench that came with unit. Take deck out from the side, put in new deck, re-install parts that were removed.